



Doosan Infracore
Forklifts

PRO5
SERIES



D110 / 130 / 160S-5
25,000lb , 29,000lb , 36,000 lb
Diesel , Pneumatic Tire

Full Product Line

Doosan offers a full line of lift trucks from 24,500 to 36,000 pounds to fill all your material handling needs. Contact your dealer for specific information on our various models and configurations.

Complete Distribution Network

Doosan lift trucks are sold and serviced by 95 dealers at over 200 locations in the U.S and Canada. Call us at 1-800-323-9662 for the location of a dealer near you, or visit us at www.doosanlift.com

For corporate information go to :
www.dhiac.com

Pneumatic Diesel Forklift Trucks

D110/130/160S-5

25,000 lb to 36,000 lb Capacity

PRO5
SERIES



PSC2604A0(Oct.2006)



Doosan Infracore
Forklifts

Doosan Infracore America Corporation
4350 Renaissance Parkway,
Warrensville Heights, Ohio, 44128 U.S.A.
Tel : 216-595-1212
Fax : 216-595-1214

AUTHORIZED DEALER

Product and specifications are subject to improvement and change without notice.

TOUGH, PRODUCTIVE AND GOOD LOOKIN' TO !

That's the complete package you'll get with our new D110-D160 pneumatic family.

The Doosan design team has pulled out all the stops to give customers the most **ROBUST** and **DURABLE** machines in our forklift product line-up.

These powerful pneumatics with their **INCREASED CAPACITY** can handle the toughest tasks in the most demanding applications with **SPEED, POWER** and **EFFICIENCY**.

- Powerful and Efficient Intercooler Turbo-charged Doosan DL06 Diesel Engine
 - 138 HP for for D110/130
 - 158 HP for D160
- Full Air Actuated Brake System
 - Service Brake
 - Parking Brake
- Integrated Operator Instrument Panel
- Pilot Actuated Hydraulic Control Valve and Levers
- Low Emission Tier III Engine
- Optional Tilttable Operator Compartment with or without Cab
- Electrically Controlled Full Autoshift Transmission
- Rugged Planetary Drive Axle



DRIVE THE DIFFERENCE...

DRIVE DOOSAN !

OPERATORS ON THE JOB WILL FEEL RIGHT AT HOME

..... THANKS TO ALL THE COMFORT AND CONVENIENCE FEATURES IN OUR HUMAN ENGINEERED OPERATOR COMPARTMENT

D110/130/160S-5 series comes equipped with our optimized operator comfort systems.

The combination of a spacious operator compartment with a variety of operational enhancements will boost productivity in any application.

Operators can efficiently control and monitor the truck operational status at a glance from their seated position.

Operator friendly features include:

- **Spacious Operator compartment**

Wide operator leg room, tiltable steering column and ergonomically located operator pedals with a low cowl height facilitate ease of operation.

- **Optional Deluxe Operator Cab**

The all round visibility and deluxe operator cab is newly designed for maximum comfort of climate control. Highly visible front, top glass, side slide windows and numerous options will make operators feel right at home on the job.

- **Deluxe Suspension Seat**

Full suspension deluxe seat with 6 directional adjustments keeps operators fresh and productive throughout the shift.

- **Integrated Instrument Panel**

The centralized and integrated easy-to-read instrument panel maximizes operator efficiency. Fuel gauge, engine hour meter, air pressure gauge, engine oil pressure, coolant and transmission temperature gauge keeps operator aware of all vehicle performance systems

- **Pilot Actuated Hydraulic Control Valve and levers**

with minimal valve throw provides smooth and responsive hydraulics for superb operator control.

- **Wide Foot Steps and Grab Bar**

Wide and large open foot steps with anti-skid surface and a conveniently positioned overhead guard pillar grab bar provide effortless entry and exit.

- **Built in Air conditioning Duct and Grills (with Optional Operator Cab)**

are operator friendly positioned for maximum comfort in any environment.



DRIVE THE DIFFERENCE...

DRIVE DOOSAN !

**MINIMIZED MAINTENANCE,
EASY SERVICEABILITY!**



DRIVE THE DIFFERENCE...



one touch tilting cabin switch

A HALLMARK OF DURABILITY, RELIABILITY AND SERVICEABILITY

Doosan forklift trucks are designed with longevity in mind. A Doosan truck has specific design elements that enhance the reliability of its parts for decreased wear and tear and increased endurance. Count on the reliability of a Doosan forklift truck for peace of mind allowing you to concentrate on aspects of your business besides material handling

● **A Planetary Type Drive Axle**

Planetary drive axle assembly with steel housing features hardened load-bearing spindles and full-floating axle shafts with positive oil flow to all gears and bearings, four-pinion, hypoid differential and radically floating sun and ring gear.



● **Pre-Cleaner and Dual Element Air Cleaner**

Heavy duty air cleaning system extend engine service life and allows clean, cool air into the engine intake system.



● **Optional Side Tiltable Operator Compartment and Tilttable Operator Cab**

makes servicing of all powertrain components quick and easy. An electrically assisted hydraulic actuated cylinder tilts operator compartment to left side about 65 degrees for easy access to inside truck components



DRIVE DOOSAN!

**TOUGH, PROVEN AND RELIABLE COMPONENTS....
GUARANTEE EFFICIENT AND PRODUCTIVE OPERATION**

**WE'VE COMBINED POWER WITH EFFICIENCY TO
GIVE YOU THE MOST PRODUCTIVE TRUCK IN THIS
PRODUCT RANGE.**


● **Low emission, High power and Fuel Efficient 5.9 Liter Diesel Engine**

Doosan DL06 turbo-intercooler (air cooler) diesel engine complies with EPA Tier III and Euro Stage 3 emission regulations. The electric governed engine control system provides high performance and low fuel consumption rates for excellent economical operation. Six cylinders, Common Rail Direct Injection, full range electrical governor and a heavy duty fuel filter with water separator, all add up to a powerful and efficient power plant.



● **Fully Electric controlled Autoshift Transmission**

provides electronic inching enabling even massive loads to be moved with great precision. Fully capable of shifting under power, soft gear shifting is achieved with 3 forward and 3 reverse gears. Maintenance requirements and service life are greatly enhanced.

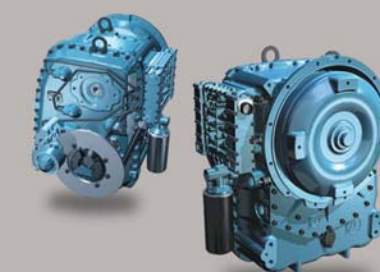

● **Hydraulic Motor Driven Remote Cooling Fan**

A large capacity cooling fan driven by a remote hydraulic motor effectively manages operating temperatures to enhance engine wear and productive capacity.



DRIVE THE DIFFERENCE...

DRIVE DOOSAN !

PROVEN QUALITY,
RESPONSIVE SERVICE AND
A RELIABLE PARTNER....


Doosan’s goal is to make your material handling operations as efficient and reliable as possible.

After sales servicing of Doosan forklift trucks is available from both the selling dealership and Doosan’s own customer service center. And Doosan provides 100% parts inventory to insure any downtime is minimized. When you own a Doosan forklift truck, our high quality, responsive customer support team comes with it.

The Doosan network starts with your local dealer and ends with a national team of highly qualified and experienced personnel standing ready to support all your material handling needs.



DRIVE THE DIFFERENCE...

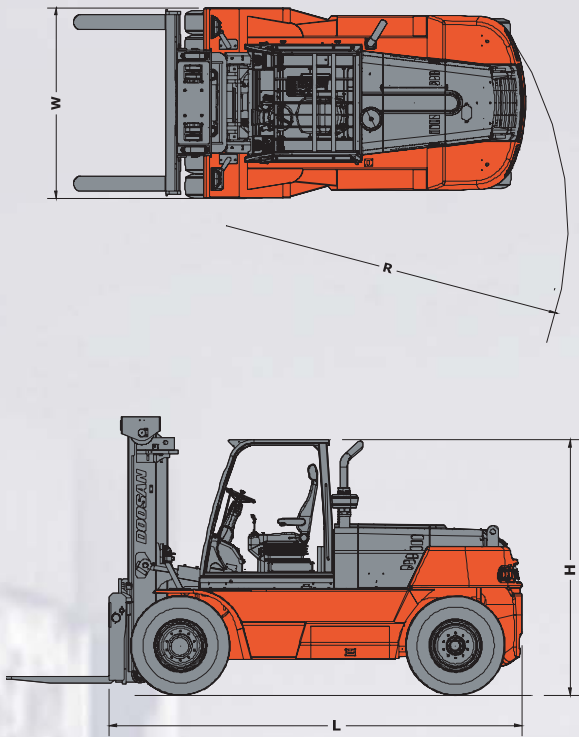

Option Availability

Options	● : Standard ○ : Optional		
	D110S-5	D130S-5	D160S-5
2 Section Valves (Pilot Operated)	●	●	●
3 Section Valves (Pilot Operated)	○	○	○
4 Section Valves (Pilot Operated)	○	○	○
5 Section Valves (Pilot Operated)	○	○	○
Deluxe Suspension Seat- Vinyl	●	●	●
Deluxe Suspension Seat- Cloth*	○	○	○
Tilttable Operator Cab	○	○	○
Air Conditioner / Heater	○	○	○
Sound Suppression Package	○	○	○
CD Player & Radio for Cabin	○	○	○
2 Rear Working Lights	○	○	○
4 Working Lights	○	○	○
2 Front Lights on Fender	○	○	○
Rear Strobe Lamp	○	○	○
Spark Arrestor	○	○	○
Solid Soft Tires	○	○	○
Catalytic Muffler	○	○	○
Battery Isolated Switch	○	○	○
Lockable Fuel Cap	○	○	○
Lift and Tilt Locking	●	●	●

* : The cloth deluxe suspension seat is provided with optional operator cab

Main Specification

Sales Models			D110S-5	D130S-5	D160S-5
Rated Load Capacity		in(kg)	25,000(11,000)	29,000(13,000)	36,000(16,000)
Load Center		in(mm)	24 (600)	24 (600)	24 (600)
Overall Width	W	in(mm)	92.5 (2350)	92.5 (2350)	98.0 (2490)
Overall Length to Fork Face	L	in(mm)	170.9 (4340)	170.9 (4340)	185.6 (4715)
Height to Overhead Guard	H	in(mm)	108.9 (2765)	108.9 (2765)	115.2 (2928)
Minimum Turning Radius	R	in(mm)	159.0 (4040)	159.0 (4040)	173.2 (4400)
Wheel Base		in(mm)	112.2 (2850)	112.2 (2850)	124.0 (3150)
Travel Speed, Loaded		mph(km/h)	20.5 (33.0)	20.5 (33.0)	18.0 (29.0)
Lifting Speed, Loaded		fpm(mm/s)	88.6 (450)	84.6 (430)	80.7 (410)
Engine Model			DL06	DL06	DL06
Engine Maker			Doosan	Doosan	Doosan
Rated Power of Engine		HP(PS)@rpm	138.0(140)@2100	138.0(140)@2100	157.8(160)@2100
Displacement of Engine		in³(cc)	359.3 (5890)	359.3 (5890)	359.3 (5890)
Number of Cylinder			6	6	6
Number of Speed(Fwd/Rev)			3 / 3	3 / 3	3 / 3

DRIVE DOOSAN !



TECHNICAL SPECIFICATIONS

Pneumatic Diesel Forklift Trucks
D110/130/160S-5
25,000 lb to 36,000 lb Capacity

PRO5
SERIES



25,000/29,000/36,000 lb Capacities

Engine Powered Forklift Trucks Pneumatic Tire, Diesel


MAIN VEHICLE SPECIFICATIONS

CHARACTERISTICS	1	Manufacture			DOOSAN	DOOSAN	DOOSAN
	2	Model			D110S-5	D130S-5	D160S-5
	3	Load Capacity	at rated load center	in(kg)	25,000 (11,000)	29,000 (13,000)	36,000 (16,000)
	4	Load Center		in(mm)	24 (600)	24 (600)	24 (600)
	5	Power Type	Elec, Diesel, LPG, Gasoline		Diesel	Diesel	Diesel
	6	Operator Type			driver seated	driver seated	driver seated
	7	Tire Type	P: Pnu, E: Solid Soft, C: Cush		P	P	P
	8	Wheels (x=Driven)	Front / Rear		2 x 2 / 2	2 x 2 / 2	2 x 2 / 2
DIMENSIONS	9	Max. Fork Height	with STD 2-stage mast	in(mm)	118.0(3,000)	118.0(3,000)	118.0(3,000)
	10	Free Lift		in(mm)	0	0	0
	12	Fork Carriage	ISO Class		-	-	-
	13	Forks	Length x Width x Thickness	in(mm)	53.1 x 7.87 x 2.7 (1350 x 200 x 70)	53.1 x 7.87 x 3.3 (1350 x 200 x 85)	53.1 x 7.87 x 3.3 (1350 x 200 x 85)
			Fork Spacing(Min x Max)	in(mm)	18.5 x 84.2 (470 x 2,140)	18.5 x 84.2 (470 x 2,140)	18.5 x 90.2 (470 x 2,290)
	14	Tilt of Mast	Forward/Backward	deg	15 / 12	15 / 12	15 / 12
	15	Overall Dimensions	Length to Fork Face	in(mm)	170.9 (4,340)	170.9 (4,340)	185.6 (4,715)
	16		Overall Width	in(mm)	92.5 (2,350)	92.5 (2,350)	98.0 (2,490)
	17		Mast Lowered Height	in(mm)	117.0 (2,970)	117.0 (2,970)	124.8 (3,170)
	18		Mast Extended Height	in(mm)	176.0 (4,470)	176.0 (4,470)	183.9 (4,670)
	19		Overhead Guard Height	in(mm)	108.9 (2,765)	108.9 (2,765)	115.2 (2,928)
	20		Seat Height	in(mm)	65.4 (1,660)	65.4 (1,660)	71.6 (1,820)
	21	Turning Radius	Minimum outside	in(mm)	159.0 (4,040)	159.0 (4,040)	173.2 (4,400)
	22	Load Moment Center		in(mm)	29.7 (755)	29.9 (760)	32.0 (815)
	23	Aisle 90 degree stacking(add load length & clearance)		in(mm)	188.6 (4790)	188.6 (4790)	204.5 (5195)
PERFORMANCE	24	Travel Speed	Loaded/Unloaded	mph(km/h)	20.5/ 22.3 (33.0 / 36.0)	20.5/ 22.3 (33.0 / 36.0)	18.0 / 20.5 (29.0 / 33.0)
	25	Lifting Speed	Loaded/Unloaded	fpm(mm/s)	88.6 / 96.5 (450 / 490)	84.6 / 96.5 (430 / 490)	80.7 / 88.6 (410 / 450)
	26	Lowering Speed	Loaded/ Unloaded	fpm(mm/s)	94.5 / 84.6 (480 / 430)	94.5 / 84.6 (480 / 430)	84.6 / 80.7 (430 / 410)
	28	Max. drawbar pull	Loaded at 1.0 mph(1.6 km/h)	lb(kg)	17,813 (8,080)	17,813 (8,080)	22,928 (10,400)
	30	Max. gradeability	Loaded at 1.0 mph(1.6 km/h)	%	33.0	29.5	28.5
WEIGHT	32	Total Service Weight , Unloaded		lb(kg)	33,180 (15,050)	36,220 (16,430)	42,330 (19,200)
	33	Axle Load	Loaded, Front / Rear	lb(kg)	52,979/ 5,210 (23,490 / 2,560)	59,375/ 5,845 (26,660 / 2,770)	71,885 / 6,445 (31,870 / 3,330)
	34		Unloaded, Front / Rear	lb(kg)	16,005 / 17,175 (7,260 / 7,790)	16,445 / 19,775 (7,460 / 8,970)	19,135 / 23,195 (8,680 / 10,520)
CHASSIS	35	Tires	Number of wheels (F/R)		4 / 2	4 / 2	4 / 2
	36		Size , Front		10.00 x 20 - 16PR	10.00 x 20 - 16PR	12.00 x 20 - 18PR
	37		Size , Rear		10.00 x 20 - 16PR	10.00 x 20 - 16PR	12.00 x 20 - 18PR
	38	Wheel Base	Distance	in(mm)	112.2 (2,850)	112.2 (2,850)	124.0 (3,150)
	39	Tread Width	Front / Rear	in(mm)	67.8 / 73.2 (1,724 / 1,860)	67.8 / 73.2 (1,724 / 1,860)	71.8 / 75.2 (1,825 / 1,910)
	40	Ground Clearance	Loaded at the lowest point	in(mm)	10.6 (270)	10.6 (270)	10.6 (270)
			Loaded at center of wheelbase	in(mm)	14.2 (360)	14.2 (360)	14.6 (370)
	42	Brakes	Service		Foot / Air	Foot / Air	Foot / Air
	43		Parking		Hand / Air	Hand / Air	Hand / Air
POWER TRAIN	45	Battery	Voltage / Ampere	V/AH	24(12 x 2) / 100	24(12 x 2) / 100	24(12 x 2) / 100
	49	Engine	Manufacturer / Model		Doosan / DL06	Doosan / DL06	Doosan / DL06
	50		Rated Power (DIN)	HP(PS)/rpm	138.0(140) / 2,100	138.0(140) / 2,100	157.8(160) / 2,100
				kW/rpm	103 / 2,100	103 / 2,100	117.8 / 2,100
	51		Maximum Torque	lb · ft/rpm	427.8 / 1,400	427.8 / 1,400	485.9 / 1,400
				kg · m/rpm	59.0 / 1,400	59.0 / 1,400	67.0 / 1400
	52		Cylinders/ Displacements	in³(CC)	6 / 359.3 (5,890)	6 / 359.3 (5,890)	6 / 359.3 (5,890)
	55	Transmission	Type		Full Autoshift	Full Autoshift	Full Autoshift
			Number of Speed (Fwd/Rev)		3 / 3	3 / 3	3 / 3
57	Hydraulic Pressure	System	psi(bar)	2,755 (190)	2,755 (190)	3,045 (210)	
		Attachment	psi(bar)	2,030 (140)	2,030 (140)	2,030 (140)	

Note: Specification values quoted in this specification sheet has been rounded. Performance may vary due to operation conditions.

Products and specifications are subject to improvement and change without prior notices.

DIMENSIONAL DRAWING

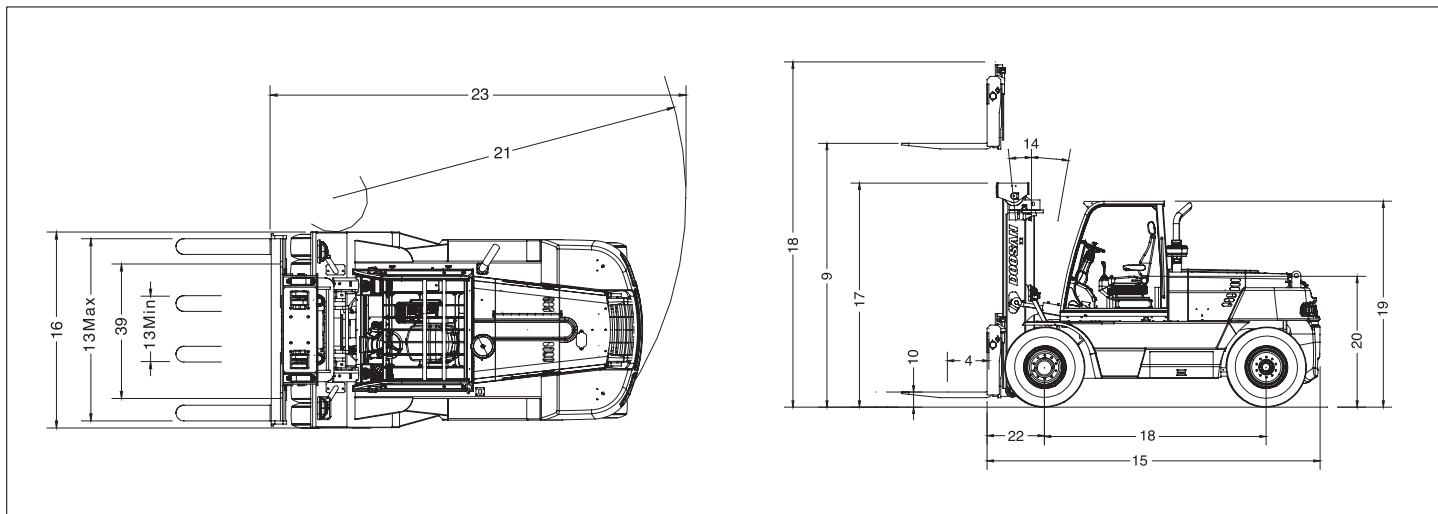

MAST SPECIFICATIONS and RATED CAPACITIES

Model	Mast Type	Maximum Fork Height		Fully Lowered Height		Fully Extended Height		Free Lift		Rated Load Capacities			
						With Load Backrest		With Load Backrest		Tilt Angle		LC 600mm	LC 24 in
						mm	in	mm	in	FWD deg	BWD deg		
D110S-5	STD	mm	in	mm	in	mm	in	mm	in	deg	deg	kg	lb
		3000	118	2965	117	4465	176	0	0	15	12	11000	25000
		3500	138	3215	127	4965	195	0	0	15	12	11000	25000
		4000	157	3465	136	5465	215	0	0	15	12	11000	25000
		4500	177	3715	146	5965	235	0	0	15	12	11000	25000
		5000	197	4165	164	6665	262	0	0	15	12	11000	25000
		5500	217	4415	174	7165	282	0	0	15	12	10500	23850
		6000	236	4665	184	7665	302	0	0	15	12	9500	21600
D130S-5	STD	3000	118	2965	117	4465	176	0	0	15	12	13000	29000
		3500	138	3215	127	4965	195	0	0	15	12	13000	29000
		4000	157	3465	136	5465	215	0	0	15	12	13000	29000
		4500	177	3715	146	5965	235	0	0	15	12	13000	29000
		5000	197	4165	164	6665	262	0	0	15	12	13000	29000
		5500	217	4415	174	7165	282	0	0	15	12	12000	26750
		6000	236	4665	184	7665	302	0	0	15	12	11000	24550
D160S-5	STD	2900	114	2950	116	4400	173	0	0	15	12	16000	36000
		3000	118	3170	125	4670	184	0	0	15	12	16000	36000
		3500	138	3420	135	5170	204	0	0	15	12	16000	36000
		4000	157	3670	144	5670	223	0	0	15	12	16000	36000
		4500	177	3920	154	6170	243	0	0	15	12	16000	36000
		5000	197	4370	172	6870	270	0	0	15	12	16000	36000
		5500	217	4620	182	7370	290	0	0	15	12	15000	33750
		6000	236	4870	192	7870	310	0	0	15	12	14000	31500
	FFT	3700	146	2930	115	5335	210	1380	54	15	10	15000	33750
		4000	157	3030	119	5635	222	1480	58	15	10	15000	33750
		4500	177	3195	126	6130	241	1645	65	15	10	15000	33750
		5000	197	3360	132	6635	261	1815	71	15	10	15000	33750
		5500	217	3530	139	7135	281	1980	78	15	10	14400	32400
		6000	236	3695	145	7630	300	2145	84	15	10	13400	30150

Note: Mast specifications & Rated Capacities are based on standard chassis with pneumatic tire and without sideshifter.

TECHNICAL INFORMATION

i **Standard Equipment**

- Chassis with Doosan DL06 5.9 liter, Turbo-intercooler (Air Cooler), electric governed diesel Engine.
- 3 Speeds full autoshift transmission and inching system
- Fully hydraulic power steering with load sensing
- Integrated Instrument Panel
- Fully air actuated parking brake and service brake
- Deluxe suspension seat with retractable seat belt
- 2 front and rear flood lights and combination lamps
- Reinforced anisometric overhead guard rail for cabin
- Pilot operated lift/ tilt locking 2 spool hydraulic Valve
- High visibility 2 stage 3000 mm(118 in) Mast
- Dual element air cleaner
- 15°Forward / 12°Backward tilt cylinders.
- 1350 mm (53 in) length forks

i **Mast**

Doosan forklift trucks offer a full range of wide view masts;

- STD double mast : 3.0m(118 in) ~ 6.0m(236 in)
- FFT triple full free mast : 3.7m(145 in) ~ 6.0m(246 in) ; Suitable for stacking applications in areas with limited height clearance but where maximum lift is also required. (Available on D160S-5 only)

All masts are steel weldment uprights with rigid cross members for strength and reliability. Secondary lift cylinders have cushioning valves to ensure smooth and silent staging during lifting and lowering.

i **Carriage**

D110/130/160S-5 series is equipped with high tensile shaft mounting type carriage. An optional integrated sideshifter and fork mover is also available.

i **Full Range Electric Governed Turbocharger Doosan DL06 5.9 liter Diesel Engine**

The powerful and reliable 6 cylinder Doosan DL06 5.9 liter diesel engine provides excellent performance for even the toughest applications. Doosan DL06 diesel engine complies with EPA Tier III and Euro Stage 3 emission regulation.

High fuel injection system pressure, 4 valves per cylinder and CAC(Charged Air Cooler) turbocharger maximizes engine performance with low fuel consumption rates.

The ECU(Engine Control Unit) controls basic engine output functions, such as proper and optimum AFR(Air to Fuel Ratio), engine torque and speeds.

The ECU also protects the engine from abnormal engine conditions, such as 'High Engine Coolant Temp' and 'Low Engine Oil Pressure'.

i **Full Autoshift Transmission and Electric Inching System**

The electric control module of the transmission automatically changes truck travel speed based on the engine speed and the load on the drive wheels. With its advanced electric control system, operator is free from the inconvenience of gear shifting while driving.

Also operator can select various operating modes, such as manual shifting, starting at low speed gear shifting or at high speed gear shifting depending on application needs.

The self-diagnostics and easy check-up functions will reduce the time to troubleshoot any problems.

The electric inching system permits even massive loads to be moved with great precision. It is controlled by selection switch activated by the operator.

i **Rugged Drive Axle**

Planetary gear drive axle consists of four pinion and hypoid differential gears and radial sun and ring gears with steel housing, hardened load bearing spindle and full-floating axle shaft to protect from high impact shock loading.

Gears and bearings are positively lubricated by oil flow.

i **Air Shoe Brakes**

Large diameter and self-adjusting non-asbestos shoe brakes are provided as standard equipment. The fully air-actuated shoe brakes are boosted by large double air- compressed chambers. S-cam type mechanism provides secure brake force with low brake pedal effort. For operating safety this brake system adopts power-off system, self-lock brake system, which activates the air-parking brake in case of brake line malfunction.

i **Side Tiltable Operator Compartment and Cab**

Easy access to powertrain components is facilitated by activating the side tiltable operator compartment or optional cab at the touch of a button . The hydraulic actuated cylinder tilts operator compartment or cab to right side about 65 degrees for easy service access.

i **Operator Area**

Large, anti-skid open steps and long hand grips welded on overhead guard strut provide easy operator access to and from the seat. Infinitely adjustable tilt steer column, and deck-mounted pilot operated hydraulic control levers, ensure operator comfort and reduced fatigue. 6 direction adjustable, operator weight adjustment full-suspension deluxe seat provides comfortable working positions for all sizes of operators.

The integrated easy-to-read instrument panel alerts the operator to all truck conditions at a glance from their seated position.

i **Optional Equipment**

- Solid Soft Tires
- Tilttable Operator Compartment and Deluxe Operator Cab
- Operator Comfort Features with Operator Cab
 - Air Conditioner / Heater
 - Sound Suppression Package
 - CD Player & Radio for Cabin
- Pilot Operated 3/4/5 Spools Hydraulic Control Valve
- Integral Sideshifter or Integral Sideshifting Fork Positioner
- 4 Working Lights
- 2 Front Lights on Fender
- Rear Strobe Lamp / Spark Arrestor
- Catalytic Muffler
- Battery Isolated Switch
- Lockable Fuel Cap



Doosan Infracore
Forklifts

Doosan Infracore America Corporation

4350 Renaissance Parkway, Warrensville Heights, Ohio, 44128 U.S.A.
Tel : 216-595-1212 Fax : 216-595-1214 www.doosanlift.com